



FEATURES

- **Simple Interface** - No signal conditioning required
- **Surface Mount** - RoHS & REACH compliant, lead free, Halogen free
- **Made in USA** - fully automated production, 100% testing, worldwide quality and price leader
- **Zero-power Normally** - <50 nA when activated
- **Activation Angle** - 90°
- **Industrial Rated** - 10 year life, -40° to 85° C
- **Miniature Size** - 3.3 mm x 6.9 mm

FUNCTION

- Normally closed when below horizontal
- Non-sensitive to vibration when open
- On/off tilt sensing
- Normally open when above horizontal

APPLICATIONS

- Security, anti-tamper, anti-theft, alarms

DESCRIPTION

The SQ-SEN-390 series sensor acts like a position sensitive switch which is normally closed when below horizontal and normally open when above horizontal.

When at rest, it normally settles in a closed state. When in motion, it will produce continuous on/off contact closures. It is sensitive to both tilt (static acceleration) and vibration (dynamic acceleration). The sensor can be easily used to produce a series of CMOS or TTL level logic level or pulse train using a single resistor to limit current. The signal level can be read directly by a digital input. This can be used to interrupt (wake up) a microcontroller or can be counted to estimate the amount and duration of activity. The sensor is fully passive, requires no signal conditioning, and draws as little as 50 nA of continuous current.

PATENTS

US 7326866, 7067748, 7326867, 7421793.
Patents pending.

FUNCTIONAL DIAGRAM

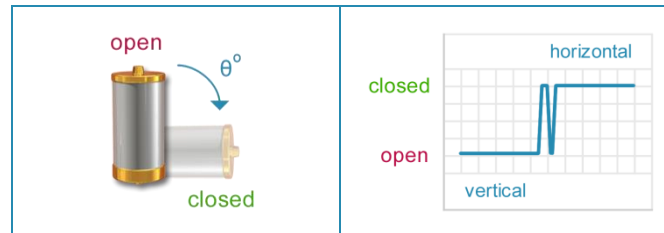


TABLE OF CONTENTS

Theory of Operation 3
Electrical Characteristics 3
Dimensions 3
Example PCB Landing 4
Product Comparison 5
Ordering Guide 5
Limitations and Warnings 6
Testing 6
System Integration Testing 6
Notice 6
Further Information 6
Notes 6

SQ-SEN-390

ON/OFF TILT SENSOR

THEORY OF OPERATION

The SQ-SEN-3XX series sensor acts like a position sensitive switch which is normally open in a range of orientations, and normally closed in another range of orientations. When resting in a normally open orientation, contacts are virtually guaranteed to be open. When resting in the normally closed orientation (unlike normally open) contacts are not guaranteed to be closed. A good rule of thumb is that they will be closed 95% - 99% of the time, when at rest.

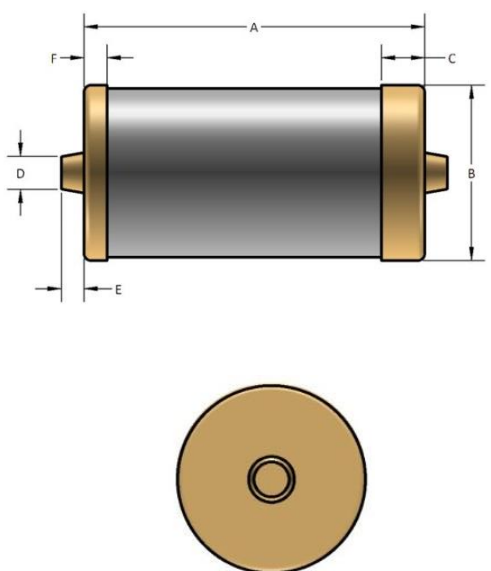
When in a normally closed orientation, the sensor will chatter open and closed as it is vibrated. The engineer should design his or her software to look for high-to-low and low-to-high edge transitions rather than an open of closed state of the switch.

CHARACTERISTICS

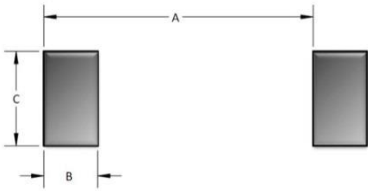
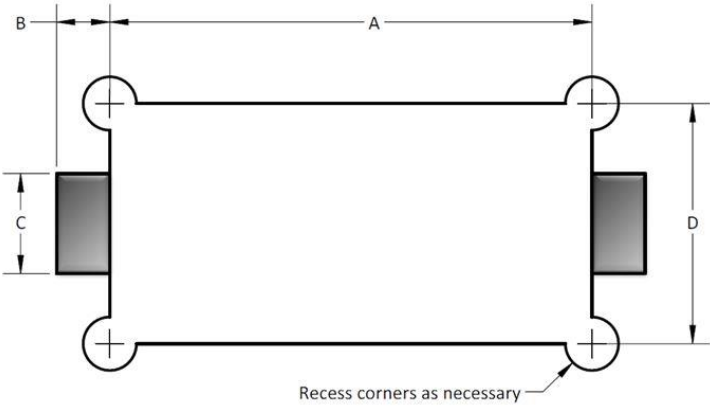
PARAMETER	MIN	MAX	CONDITIONS
Shock Survival		5,000 g	5x, 0.1 ms half-sin, any axis
Storage Temperature	-40 °C	85 °C	
Supply Voltage Range	0.5 V	12 V	
Current Sink*	50 nA	10 mA	

* Current consumption is determined by the resistance of the application circuit and the supply voltage.

DIMENSIONS

PHYSICAL SIZE			
			
SYMBOL	DESCRIPTION	MM	TOLERANCE
A	Length	6.8	±0.25
B	Diameter	3.3	±0.1
C	Terminal Width	0.8	±0.25
D	Solder Nub Diameter	0.9	±0.25
E	Solder Nub Length	0.4	±0.1
F	Terminal Width 2	0.4	±0.25

EXAMPLE PCB LANDING

RECOMMENDED PCB LANDING			ALTERNATE, PCB CUTOUT LANDING (USE FOR LOWEST PROFILE)		
SYMBOL	DESCRIPTION	MM	SYMBOL	DESCRIPTION	MM
A	Pitch	6.0	A	Recess Length	7.25
B	Pad Length	1.2	B	Pad Length	0.8
C	Pad Width	2.1	C	Pad Width	1.5
					

***Note:** Alternative layouts may be used to optimize size or manufacturability

PRODUCT COMPARISON

GRADE	ASSEMBLY METHOD	SEALED	WASHABLE	ROHS	OPERATING TEMPERATURE	CYCLES *	SERVICE LIFE (YRS)
I	Reflow Solder: 260° C peak Hand Assembly: 315° C peak, 2 -3 seconds on end terminal	Yes	Yes	Yes	-40° to +85° C	1 Billion	10
C	Reflow Solder: 260° C peak Hand Assembly: 315° C peak, 2 -3 seconds on end terminal	Yes	Yes	Yes	-25° to +70° C	1 Billion	5

*Test conditions: 0.5 gRMS, 5 to 200 Hz flat spectrum

ORDERING GUIDE

PART NUMBER	PACKAGING CODE	COMPLETE ORDER NUMBER
SQ-SEN-390-C	TR - Tape on Reel	SQ-SEN-390-CTR
SQ-SEN-390-I	CT - Cut Tape TR - Tape on Reel	SQ-SEN-390-ICT SQ-SEN-390-ITR

LIMITATIONS AND WARNINGS

This product is not designed for use in life support and/or safety equipment where malfunction of the product can reasonably be expected to result in personal injury or death. Buyer uses this product in such applications at Buyer's own risk and agrees to defend, indemnify, and hold harmless SignalQuest, Inc. from any and all damages, claims, suits, or expenses resulting from such misuse.

TESTING

The performance of each sensor is verified through build-time testing.

SYSTEM INTEGRATION TESTING

Thorough testing should be carried out prior to product release to ensure system integration has not introduced unforeseen problems. The system integrator assumes the ultimate responsibility for the safety of the target application.

NOTICE

Information furnished by SignalQuest, Inc is believed to be accurate and reliable. However, this document may contain ERRORS and OMMISIONS. Accordingly, the design engineer should use this document as a reference rather than a strict design guideline and should perform thorough testing of any product that incorporates this or any other SignalQuest product. No responsibility is assumed by SignalQuest, Inc. for this use of this information, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications are subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of SignalQuest, Inc. Trademarks and registered trademarks are the property of their respective companies.

FURTHER INFORMATION

For pricing, delivery, and ordering information, please contact SignalQuest at (603) 448-6266
For updates on this and other documents, visit our website at www.signalquest.com.

NOTES