



Industrial



Cots



Railroad

50W & 100W 24VDC Input Quarter Brick Railway DC-DC Converters



Features	Benefits
• Small Size	• Less PCB space used
• Quarter Brick Footprint	• Industry Standard size
• Full Power from -40°C to +100°C	• No Derating required - covers TX class for Railway
• UVLO Function	• Protects battery against deep discharges
• Coating Option	• According to EN50155

Specification		
Model		<div style="display: flex; justify-content: space-around;"> CN50A24-xx CN100A24-xx </div>
Input Voltage Range (5)	VDC	14.4 - 36VDC
Input Voltage Transient	VDC	40V for 3s
Input Current	A	2.5 to 4.91A (model dependant)
Output Voltage Adjustment	VDC	5V models: -10/+20% ; 12 & 24V models: +/-10%
Ripple & Noise (max) pk-pk	mV	see Model Selector
Line Regulation (max)	mV	see Model Selector
Load regulation (max)	mV	see Model Selector
Output Voltage Accuracy (1)	%	+/- 1%
Overcurrent Protection (2)	%	105 - 140%
Overvoltage Protection (3)	%	125 - 145%
Remote Sense (4)	-	Yes
Remote On/Off (4)	-	Yes (short: On - Open: Off)
Parallel Operation	-	No
Series Operation (4)	-	Yes
Operating temperature	°C	-40°C to +100°C Baseplate
Storage Temperature	°C	-40°C to +100°C
Temperature Coefficient	%/°C	0.02%/°C
Humidity (non condensing)	%RH	5-95% RH, Operating and Non Operating
Conformal Coating (5)	-	Optional - /CO suffix
Cooling (4)	-	Conduction Cooled
Withstand Voltage	VAC	Input to Baseplate: 2kVAC, Input to Output: 3kVAC for 1mn (20mA) Output to Baseplate: 500VAC for 1mn (20mA)
Isolation Resistance	Ω	100MΩ at 25°C and 70%RH, Output to Baseplate 500VDC Non Operating, 10-55Hz (sweep for 1mn).
Vibration (5)	-	Amplitude 0.825mm Constant (Maximum 49.9m/s ²) X,Y,Z 1 hour each EN/IEC 61373 - Category 1 - Grade B
Shock (5)	-	196.1m/s ² , EN/IEC 61373 - Category 1, Grade B
EMC Compliance (5)	-	Refer to Application Notes
Safety Agency Certifications	-	UL 60950-1, CSA 60950-1, EN 60950-1, CE LVD
Weight (Typ)	g	70
Size (WxHxD)	mm	36.8 x 12.7 x 57.9
Warranty	yrs	5

Notes

- (1) At 24VDC input and maximum output current; baseplate temperature = +25°C.
- (2) 5V delay shutdown when left in OCP conditions, with output voltage less than LVP (Low Voltage Protection) level.
12 & 24V : constant current limiting with automatic recovery LVP reset : Line off or Control off
- (3) OVP reset : Line off or Control off
- (4) Refer to Instruction Manual
- (5) Compliance to EN50155 & IEC60571

Model Selector


Model	Output Voltage (VDC)	Output Current (A)	Maximum Power (W)	Input ⁽¹⁾ Current (A)	Efficiency ⁽¹⁾ (%)	Output Voltage Adj (VDC)	Ripple & Noise (mV pk-pk) ⁽⁴⁾	Line ⁽²⁾ Regulation (mV)	Load ⁽³⁾ Regulation (mV)
CN50A24-5	5	10	50	2.48	85	4.5-6	100	20	40
CN50A24-12	12	4.2	50.4	2.47	86	10.8-13.2	150	48	96
CN50A24-24	24	2.1	50.4	2.47	86	21.6-26.4	240	96	192
CN100A24-5	5	20	100	4.91	86	4.75-6	100	20	40
CN100A24-12	12	8.4	100.8	4.83	88	10.8-13.2	150	48	96
CN100A24-24	24	4.2	100.8	4.83	88	21.6-26.4	240	96	192

Notes:


- (1) At 24VDC input and maximum output current; baseplate temperature = +25°C
- (2) 14.4 - 36VDC, constant load
- (3) No load - Full Load, constant input voltage
- (4) External components are necessary for operation; refer to Instruction Manual

Option: Conformal Coating for EN50155 & IEC60571 compliance: add /CO suffix to Model Name

Outline Drawing CN50A24

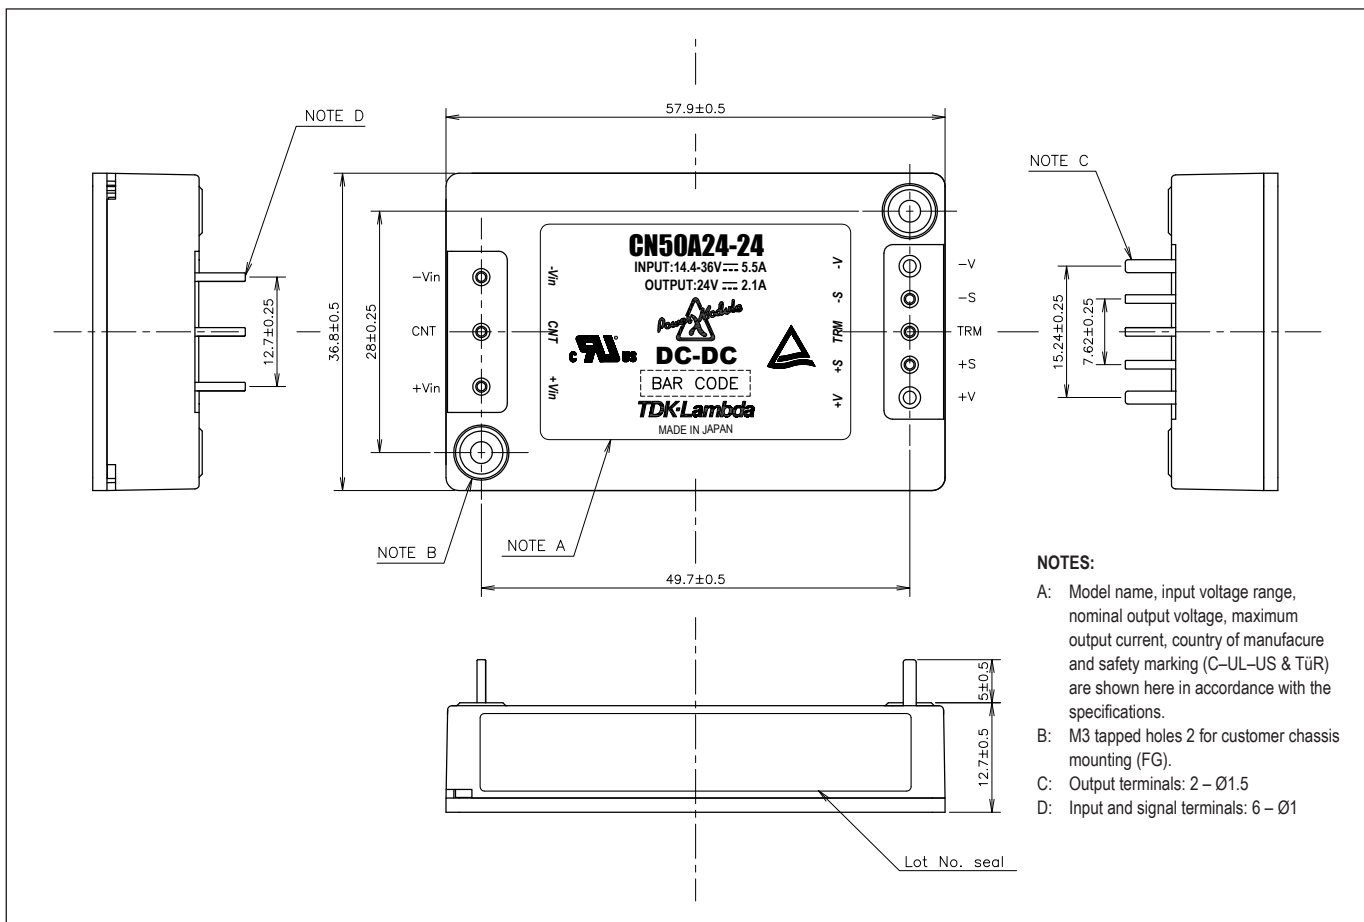

Outline Drawing CN100A24

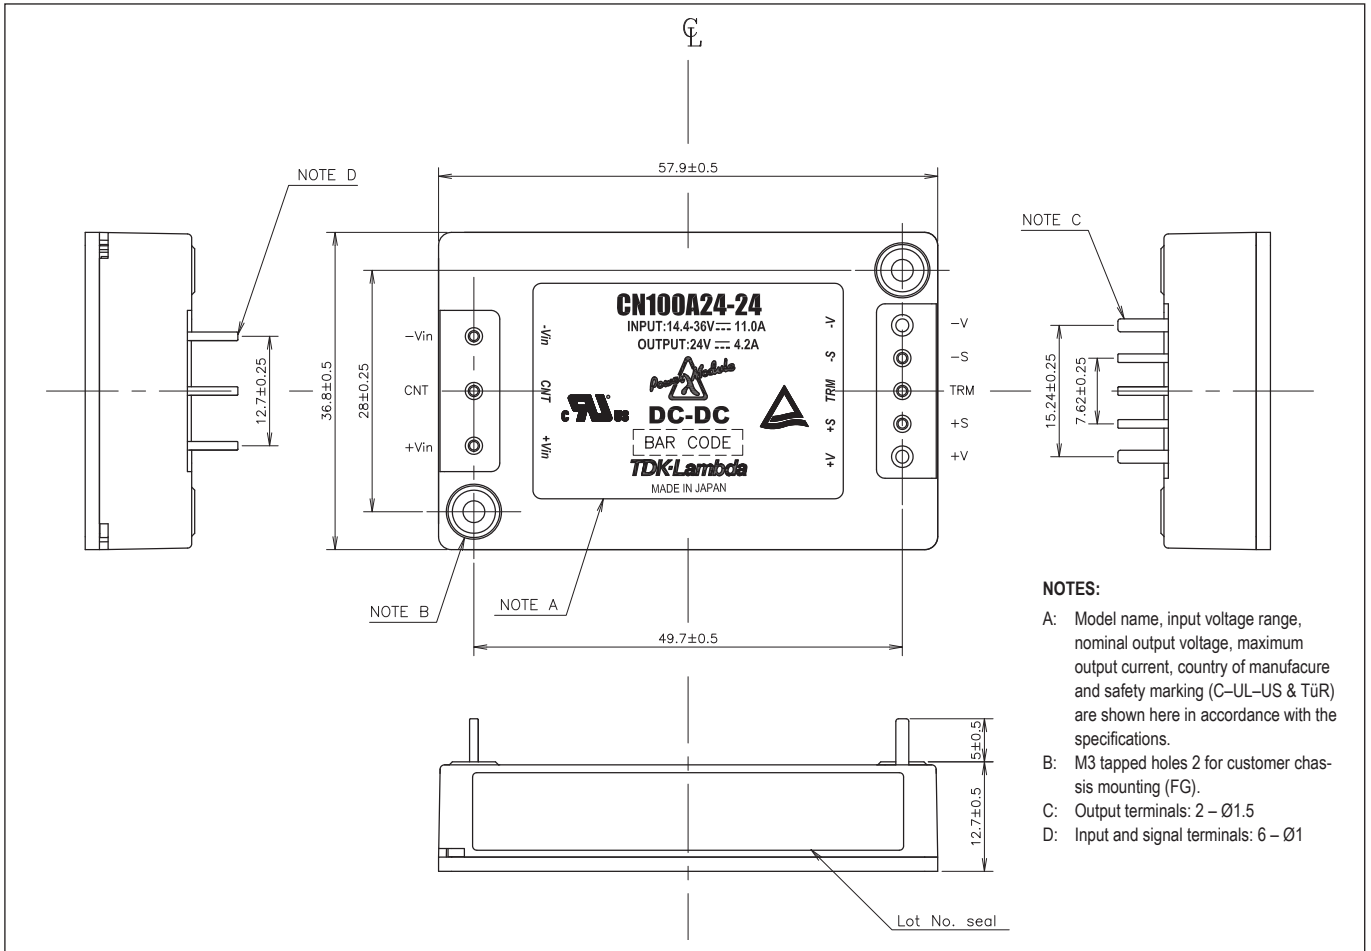

TDK-LAMBDA EMEA

www.emea.tdk-lambda.com



TDK-Lambda France SAS

ZAC des Delaches
CS 41077
9 rue Thuillere
91978 Villebon Courtaboeuf
France
Tel: +33 1 60 12 71 65
Fax: +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.fr.tdk-lambda.com



Italy Sales Office

Via dei Lavoratori 128/130
20092 Cinisello Balsamo (MI)
Italy
Tel: +39 02 61 29 38 63
Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com



Netherlands

info@tdk-lambda.nl
www.tdk-lambda.nl



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
77855 Achern
Germany
Tel: +49 7841 666 0
Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Austria Sales Office

Aredstrasse 22
2544 Leobersdorf
Austria
Tel: +43 2256 655 84
Fax: +43 2256 645 12
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Scandinavia Sales Office

Valdemarsgade 7
4100 Ringsted
Denmark
Tel: +45 58 10 35 56
Fax: +45 69 80 44 99
info@de.tdk-lambda.com
www.emea.tdk-lambda.com



TDK-Lambda UK Ltd.

Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel: +44 (0) 12 71 85 66 66
Fax: +44 (0) 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com



TDK-Lambda Ltd.

Kibbutz
Givat Hashlosha 48800
Israel
Tel: +9 723 902 4333
Fax: +9 723 902 4777
info@tdk-lambda.co.il
www.tdk-lambda.co.il



Russia

Technical Support:
St Petersburg
Tel: +7 (812) 6580463
Sales:
Moscow
info@tdk-lambda.ru
www.tdk-lambda.ru

Local Distribution